


Grooved pins full length parallel grooved with pilot end

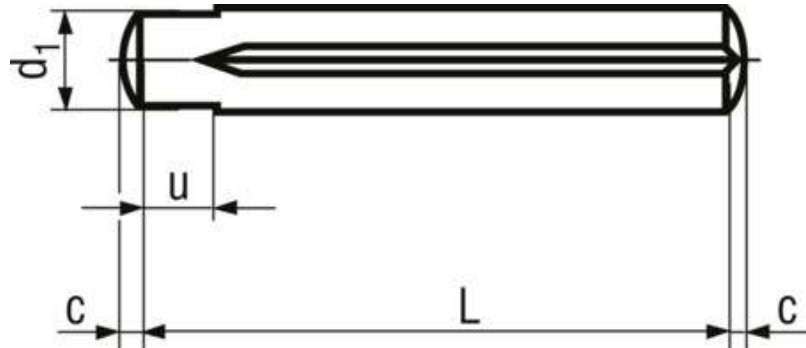

Standard **DIN 1470** (Standard withdrawn), ~ISO 8739, ~ČSN 022173

Brandtype **KS 5**


Material **Steel**

Material type **11SMnPb30**

Surface **plain**

Functional principle **As radial connecting pin**

Illustration functional principle

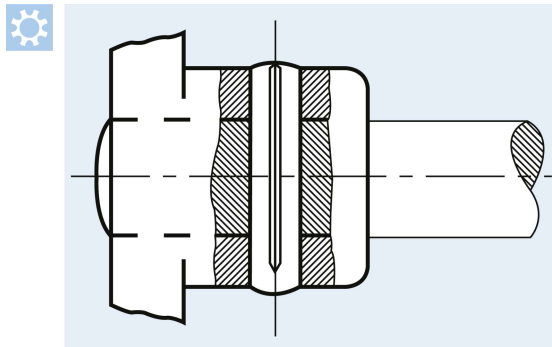

Diameter (d1)	Tolerance	Length (L)	c	u	Tolerance hole
3	h9	16	0,4	1	H11
3	h9	20	0,4	1	H11
4	h11	16	0,5	1,5	H11
4	h11	20	0,5	1,5	H11
4	h11	25	0,5	1,5	H11
4	h11	30	0,5	1,5	H11
4	h11	40	0,5	1,5	H11
5	h11	16	0,6	1,5	H11
5	h11	20	0,6	1,5	H11

Diameter (d1)	Tolerance	Length (L)	σ	u	Tolerance hole
5	h11	25	0,6	1,5	H11
5	h11	30	0,6	1,5	H11
5	h11	40	0,6	1,5	H11
6	h11	35	0,8	2	H11
6	h11	40	0,8	2	H11
6	h11	45	0,8	2	H11
6	h11	50	0,8	2	H11